


MODEL: SS-24R


POOL RECOMMENDATIONS

Recommended Minimum Pool Area Reserved For Slide Operation Is 10' x 20' With Minimum Water Depth Of 36"


OPTIONAL CONSIDERATIONS



32" Open Flume



32" Enclosed Flume

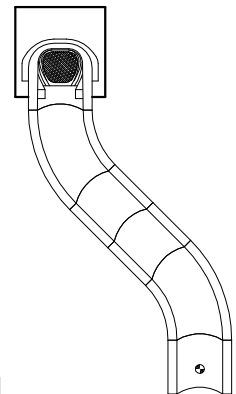

MIRROR IMAGE
MODEL: SS-24L

BASE SPECIFICATIONS

Ride Length	23.98'
Centerline Length	22.07'
Starting Elevation	4'-0"
Slope	21.04%
Flume Width	32.00"
Centerline Radius	6'-0"
Designed Water Flow	200 GPM

CONFIDENTIAL – PROPERTY OF SlideScapes, LLC

Standard Model SS-24R

DWG SCALE 1/8" = 1'-0"	DRAWN BY RLP	DWG. DATE Jan. 17, 2006
REVISION 0	REVISION DATE	DWG. NO. SS-24

SlideScapes
Custom Residential Water Slides
Phone: 770-297-0107 Fax: 770-297-0340
800-490-1597
www.waterslides.biz